


DP1001

Proximity Probe, 8 mm Probe Tip Diameter, with 3/8-24 or M10x1 Case Thread




Product Features

Measure shaft vibration and displacement on machinery with fluid film bearings.


Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.

- ▶ Probe tip and body sealed to prevent leaking through cable
- ▶ Complete hardware system is compatible with all standard condition monitoring software
- ▶ For use with PRO Line proximity probe drivers only


DP100101
Standard Mount

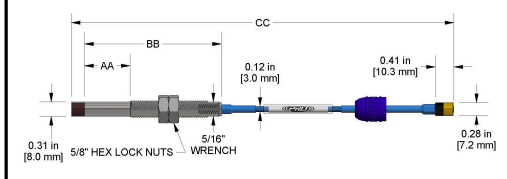


DP100103
Standard Mount

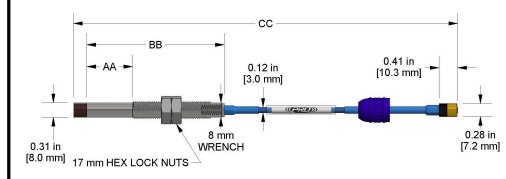

DP100105
Reverse Mount

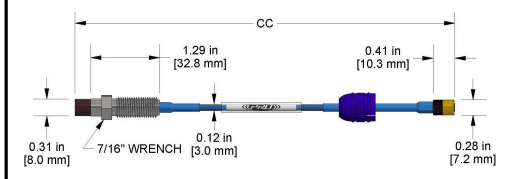

DP100106
Reverse Mount

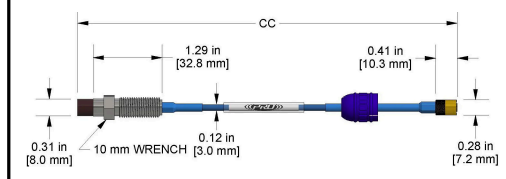

Lengths AA, BB, and CC are configurable

Specifications

Temperature Range	-49 to 340 °F (-45 to 171 °C)
Sensitivity	-200 mV/mil (-7.87 V/mm) (1 mil = 0.001 in.)
Material	FEP Cable Jacket with 316L Stainless Steel Probe Body
Case Thread	3/8-24 or M10x1
Wrench Flats	5/16 in. or 8 mm (Standard Mount), 7/16 in. or 8 mm (Reverse Mount)
Rating	IP68 Sealing, Probe Tip Pressure Rated to 100 PSI
Connector	SecureLock
Connector Pull Strength	Up to 30 lbs.
Bending Radius	1.16 in. (2.95 cm)

Built to Order

