


**Co-axial Cable with Both End BNC Connectors**

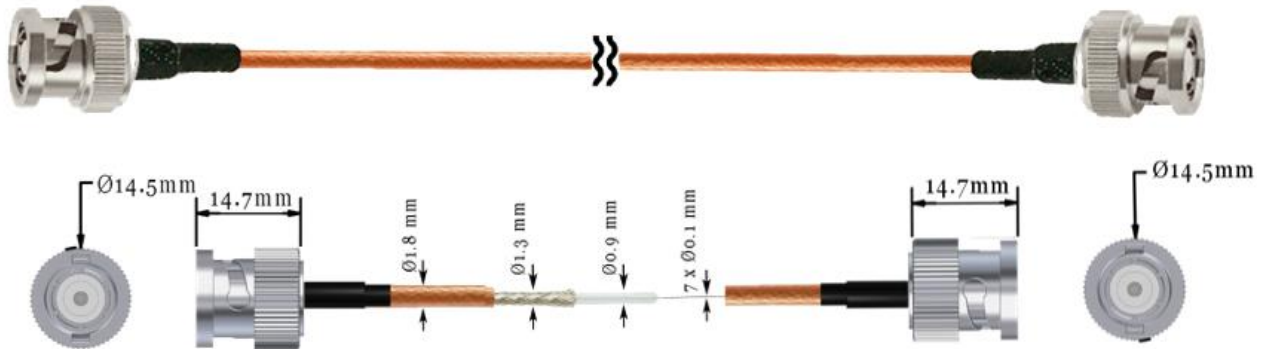

**Product Specifications**

**Co-axial Cable**

Model	CA 101
Jacket Material	FEP
Jacket Color	Brown
Cable Construction	Co-axial
Shielding Method	Tin plated Copper braid
Cable diameter	1.80mm
Centre Conductor	7/0.102
Insulation	Solid PTFE
Minimum Bend Radius	44mm
Temperature Range	-55 to 200°C
Capacitance	95.50pF / m
Characteristic Impedance	50 ± 2.5 Ω

**BNC Connector**

Model	Co -axial BNC Plug (Male)
Characteristic Impedance	50 Ω
Body Material	Stainless Steel
Strain Relief	Molded Silicon Boot
Insulation Resistance	5x10 <sup>6</sup> ohm
Shell Material	Nickel Plated Brass

Pin Contact	Gold Plated
Material	Beryllium copper
Pin Out	Center Pin: Signal, Shell: Common
Temperature Range	-60 to 200° C

---

Tyrannus Innovative Engineering & Research Academy Pvt. Ltd  
TrEST Research Park  
Ground Floor  
TC- 4/2322, GEM building,  
(Opp) College of Engineering Trivandrum  
Engineering College PO, Kerala – 695016  
[sales@tieraonline.in](mailto:sales@tieraonline.in)

